



DOSIERPUMPEN, DOSIERSYSTEMEN UND ZUBEHÖR

DOSIERPUMPEN - TEST-KITS - PULSEMITTIERENDE WASSERZÄHLER - TANKS FÜR DOSIERUNGSSYSTEME - MISCHER

DOSIERPUMPEN

EMEC V

EMEC Dosierpumpen Baureihe V



Bestellcode: **Bezeichnung:**

EMEC-V EMEC-Dosierpumpen -Baureihe V - Rabatt auf Basis der original EMEC-Preislist

EMEC K

EMEC Dosierpumpen Baureihe K




Bestellcode: **Bezeichnung:**

EMEC-K EMEC-Dosierpumpen -Baureihe K - Rabatt auf Basis der original EMEC-Preislist

ONE-Basic

Dosierpumpen One-Basic Hochfrequenz (180 Impulse / m)




One Basic - Dosing pump has a manual control for the flow rate and dosing frequency (180 impulses/min). The pump has a microcontroller regulated by a Dial Control Knob. Power supply 100:250 Vac (50-60 Hz) - Power 32 W. The settings available are the following: - Flow rate setting 0-100% and 0-20% - Proportional mode 1:1 - Level control setting (without probe)

Bestellcode:	Bezeichnung:
--------------	--------------

ONE-Basic	ETATRON-Dosierpumpen -Baureihe ONE-Basic - Rabatt auf Basis der original ETATRON-Preislist
-----------	--

ONE-MA

Dosierpumpen One-MA Hochfrequenz (300 Impulse / m)




One MA Dosing pump has a manual control for the flow rate and dosing frequency (300 impulses/min). The pump has a microcontroller regulated by a Dial Control Knob. Power supply 100:250 Vac (50-60 Hz) - Power 26 W. The settings available are the following: - Flow rate setting 0-100% and 0-20% - Proportional mode 1:1 - UNDERLOAD/Suction alarm OVERLOAD/Discharge alarm - Level control setting (without probe)

Bestellcode:	Bezeichnung:
--------------	--------------

ONE-MA	ETATRON-Dosierpumpen -Baureihe ONE-MA - Rabatt auf Basis der original ETATRON-Preislist
--------	---

ONE-MF

Dosierpumpen One-MF - Multifunktions-Mikroprozessor-Dosierpumpe



Multifunction microprocessor dosing pump, suitable for applications which require proportional dosing. The pump operates at a high dosing frequency (300 impulses/min)

and is equipped with backlit graphic display for correct setting of the various programming parameters. The functions performed by the pump are as follows:

- Calibration procedure of the actual impulse injection rate delivered to a specified need
- Manual flow rate regulation 0..100 %, 0..300 impulses/min
- Proportional mode 1 x n (pulse multiplier), at each signal from the pulse supply emitting meter corresponds "n" injections of the pump, during the injections any following pulses neglected

- Proportional mode 1 x n(M) (pulse multiplier with memory), at each signal from the pulse supply emitting meter corresponds "n" injections of the pump, during the injections the following

- pulses from the meter are memorized and the pump modifies "n" (injections to be delivered) in proportional to the pulses received from the meter during the dosing
- 1:n function (pulse divider), at each signal from the pulse supply emitting meter the pump delivers a dosing product injection

- ml x 1, at each signal from the pulse supply emitting meter the pump delivers a specific amount of the dosing product in "ml" (millilitres), corresponding to the value set during the programming phase

- l x l function, at each signal from the pulse supply emitting meter the pump delivers a specific amount of dosing product in "l" (litres), corresponding to the value set during the programming phase

- ml x m3 function, at each signal from the pulse supply emitting meter which indicates the transition of 1 m3 of solution, the pump delivers a specific amount of dosing products in "ml" (millilitres), corresponding to the value set during the programming phase



- ppm function, the dosing pump makes the necessary calculations and doses the exact amount of ppm (parts per million) set during the programming phase
- mA function, the pump doses in a proportionally to the current signal (usually 4..20mA) sent from a flow meter or another connected device
- UNDERLOAD – Suction alarm
- OVERLOAD – Discharge alarm
- Flow sensor alarm – the activation of this alarm indicates an injection failure. A Flow Sensor, located on the discharge side of the pump head, has not detected a predetermined number of injections. Despite the activation of the electromagnet
- Alarm for too many pulses from the supply pulse emitting meter – this is activated when the set parameters, in the functions "1 x n(M)" and "ppm", have been exceeded from the supply pulse emitting meter. The user must restore the correct setting of the dosing pump
- Level switch control
- Relay output for signalling the alarm status.

Bestellcode: **Bezeichnung:**

ONE-MF ETATRON-Dosierpumpen -Baureihe ONE-MF - Rabatt auf Basis der original ETATRON-Preislist

ONE-Plus

Dosierpumpen One-Plus Multifunktions-Mikroprozessor Proportional / Instrumental pH, Rx, Cl, ppm Überwachung



MAXI-MF PLUS		
Versione Version	Portata Flow rate l/h (US Gal/h)	Pressione Pressure bar (psi)
0310	3 (0.78)	10 (145)
0520	5 (1.32)	20 (290)
0507	5 (1.32)	7 (101)
0810	8 (2.12)	10 (145)
1010	10 (2.64)	10 (145)
1501	15 (3.96)	4 (58)
2005	20 (5.26)	5 (72)
3005	30 (7.92)	5 (72)

BASIC		
Versione Version	Portata Flow rate l/h (US Gal/h)	Pressione Pressure bar (psi)
0210	2 (0.53)	10 (145)
0507	5 (1.32)	7 (101)

The eOne Plus microprocessor dosing pump is suitable for proportional and control applications: pH, Rx, Cl, ppm monitoring. The pump operates at high dosing frequency (300 impulses/min) and is equipped with backlit graphic display for correct setting of various programming parameters. The functions performed by the pump are: Proportional mode Functions (MF). The pump performs exactly the same functions that as in the eOne MF description. Controller mode Functions. The dosing pump activates the measuring input pH, ORP, Cl, range • Sensor calibration: 0.00 ÷ 14.00 "pH", -1000 ÷ +1400 mV "Redox", 0÷2, 0÷20, 0÷200 ppm (Cl), 0÷2, 0÷20, 0÷200 ppm (Ion-selective sensor of for a specific chemicals) • Temperature control definition: automatic (connection to PT100 sensor) or manual (default 25°C) • Setting for the value of set point

• Type of intervention (direct or inverse) • Hysteresis setting • ON/OFF or proportional activation mode • Delay time of the pump activation • MAX alarm, for maximum measure • MIN alarm, for minimum measure • Over alarm, indicates an overdose situation. This is activated when the defined set point value is not reached in a predetermined time • Level switch control • Relay output for signalled alarm status.

Bestellcode:


Bezeichnung:

ONE-Plus

ETATRON-Dosierpumpen -Baureihe ONE-Plus - Rabatt auf Basis der original ETATRON-Preislist

E-Control

E-Control Mess- und Kontrollinstrumente

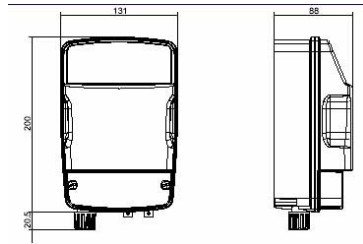

The eControl series of controllers have been designed and developed to be used in wellness centres, domestic and public swimming pools. The controllers use galvanic isolated micro-processors protecting the measured readings from the application environment.

The principal functions performed by the eControl are:


- Sensor calibration: 0.00 ÷ 14.00 "pH", -1000 ÷ +1400 mV "Redox", 0÷2, 0÷20, 0÷200 ppm (Cl), 0÷2, 0÷20, 0÷200 ppm (Ion-selective sensor of for a specific chemicals).
 - Temperature control definition: automatic (connection to PT100 sensor) or manual (default 25°C)
 - 2 set points for each measure input.
 - Type of intervention (direct or inverse).
 - Hysteresis
 - ON/OFF or proportional activation mode
 - Delay time of the pump activation
 - MAX alarm, for maximum measure. (optional)
 - MIN alarm, for minimum measure. (optional)
 - Over alarm, indicates an overdose situation. This is activated when the defined set point value is not reached in a predetermined time
 - Relay output for signalled alarm status. (optional)
- Optional - eControl with double measurement ranges that are independently configurable.

Bestellcode: **Bezeichnung:**

E-Control Kontrollinstrument - Rabatt auf Basis der original ETATRON-Preislist

DLX-MA/AD

Dosierpumpen DLX-MA/AD - Wand- (DLX) oder Bodenmontage (DLXB)



Analogic dosing pump, manual flow rate adjustment from 10÷100% with double regulating scale *Level control setting+ Extra price € 14,00


Wall mounted dosing pumps (DLX) or foot mounted (DLXB). - Plastic casing.- IP 65 protection. - Std valves: Viton®- Level control setting (supplied without probe):only -- /M series (--/AD series upon request) (*) pumps supplied with manual air bleed pump head.

Bestellcode: **Bezeichnung:**

DLX-MA/AD Dosierpumpe DLX-MA/AD - Rabatt auf Basis der original ETATRON-Preislist

DLX-MA/MB

Dosierpumpen DLX-MA/MB - Wand- (DLX) oder Bodenmontage (DLXB)



Microcontroller dosing pump, manual flow rate adjustment from 0÷100%, 3 digit display. Level control setting (supplied without probe).


Wall mounted dosing pumps (DLX) or foot mounted (DLXB). - Plastic casing. - IP 65 protection. - Std valves: Viton®- Level control setting (supplied without probe):only -- /M series (--/AD series upon request) (*) pumps supplied with manual air bleed pump head.

Bestellcode:	Bezeichnung:
--------------	--------------

DLX-MA/MB	Dosierpumpe DLX-MA/MB - Rabatt auf Basis der original ETATRON-Preislist
-----------	---

DLX-VFT/MBB

Dosierpumpen DLX-VFT/MBB - Wand- (DLX) oder Bodenmontage (DLXB)



Microprocessor based model having proportional/manual modes: Manual mode; Pulse multiplier (1x n); Pulse multiplier with memory (1x n -M); Pulse divider (1: n).


Wall mounted dosing pumps (DLX) or foot mounted (DLXB). - Plastic casing. - IP 65 protection. - Std valves: Viton®- Level control setting (supplied without probe):only -- /M series (--/AD series upon request) (*) pumps supplied with manual air bleed pump head.

Bestellcode:	Bezeichnung:
--------------	--------------

DLX-VFT/MBB	Dosing pump DLX-VFT/MBB - Rabatt auf Basis der original ETATRON-Preislist
-------------	---

DLX-MF/M

Dosierpumpen DLX-MA/M - Wand- (DLX) oder Bodenmontage (DLXB)



Multifunctions metering pump. Operating functions: Manual; 1xN; 1xN (M); 1:N; ppm and mA. Additional features: flow alarm; level switch input (without probe); relay output; buzzer; clock; timer; language italian/english.MF/M at 120V is CSA certified


Wall mounted dosing pumps (DLX) or foot mounted (DLXB). - Plastic casing. - IP 65 protection. - Std valves: Viton®- Level control setting (supplied without probe):only -- /M series (--/AD series upon request) (*) pumps supplied with manual air bleed pump head.

Bestellcode: **Bezeichnung:**

DLX-MF/M Dosierpumpe DLX-MF/M - Rabatt auf Basis der original ETATRON-Preislist

DLX-pH-RX-CL/M

Dosierpumpen DLX-pH-Rx-CL/M - Wand- (DLX) oder Bodenmontage (DLXB)



Microcontroller dosing pump, LCD display, builtin pH instrument, ON/OFF - proportional operation mode, temperature compensation, 0÷14 pH measuring range, 4÷20 mA output.

Wall mounted dosing pumps (DLX) or foot mounted (DLXB). - Plastic casing. - IP 65 protection. - Std valves: Viton®- Level control setting (supplied without probe):only -- /M series (--/AD series upon request) (*) pumps supplied with manual air bleed pump head.

Bestellcode: **Bezeichnung:**

DLX-pH-RX-CL/M Dosierpumpe DLX pH-Rx-CL/M - Rabatt auf Basis der original ETATRON-Preislist

DP-Accessories

Zubehör für Dosierpumpe ETATRON

Bestellcode: **Bezeichnung:**

DP-Accessories Zubehör für Dosierpumpe ETATRON - Rabatt auf Basis der original ETATRON-Preislist

Phmetro E.CO.ph

Phmeter E.CO.ph



Controller designed to measure, control and regulate the pH value • Measuring range 0÷14 pH. • Temperature compensation • Numeric LCD (3 digits) • Regulation of 2 independent intervention set-points • 2 ON/OFF outputs • Output 4-20 mA • Power consumption 6 Watts • Electrode supplied upon request

Bestellcode:	Bezeichnung:
DPPHECO01	Ph.meter.E.CO.pH*

CLmetro E.CO.CL

CLmeter E.CO.CL



Controller designed to measure, control and regulate the free residual Chlorine value • Measuring range 0÷10 ppm • Numeric LCD (3 digits) • Regulation of 2 independent intervention set points • 2 ON/OFF outputs • Output 4 - 20 mA • Power consumption 2 Watts • Chlorine Cell supplied upon request

Bestellcode:	Bezeichnung:
DPCLECO01	

RXmetro E.CO.RX

Rxmeter E.CO.Rx



Controller designed to measure, control and regulate the redox value •
 Measuring range ± 1.400 mV
 • Numeric LCD (4 digits) • Regulation of 2 independent intervention set-
 points • 2 ON/OFF outputs
 • Output 4-20 mA • Power consumption 6 Watts • Electrode supplied upon
 request

Bestellcode:	Bezeichnung:
DPRXECO01	Rx.meter.E.CO.Rx*

TEST-KITS

AN-KIT

Schnelltest-Kits



Bestellcode:	Bezeichnung:
KA001001	m-acidity tit. 1 °F
KA001002	p/m-alkalinity tit. 1 °F
KA001003	boiler-alkalinity (p and m) 1 epm
KA001004	M-alkalinity tit. 1 °F
KA001005	p-alkalinity tit. 1 epm
KA001006	ammonia (Nessler) col.0,25-4 ppm
KA001007	carbonic acid tit. (0,5 °F)
KA001008	strong anions tit. (to be used with KA001001)
KA001009	calcium tit. (1 °F)
KA001010	chlorine total col.0,1-1,5 ppm
KA001011	chlorine DPD col.0,1-1,5 ppm
KA001012	chloride by titration 1 °F
KA001013	chromate col. 0,05-1 ppm
KA001014	deionisation col (pH)
KA001015	hardness tit. 1°F
KA001016	iron col. 0,05-1 ppm
KA001017	phosphate col. 1-20 ppm
KA001018	hydrazine col. 0,1-1,5 ppm
KA001019	nitrite col.
KA001020	pH 0-5 col.
KA001021	pH 6.8-8.4 col.
KA001022	pH 1-11 (univers) col.
KA001023	swim.pool pH, free and comb.Cl col.(phenol red and Cl DPD)
KA001023-1	swim.pool pH and free Cl col.(phenol red and Cl DPD)
KA001024	silica col.(0,25-8 ppm)
KA001025	sulfite tit. 2 ppm
KA001025-1	sulfite tit. 10 ppm
KA001026	total alkalinity tit. 1 epm
KA001027	boiler hardness tit. 1 °F
KA001028	nitrate col. 10-140 ppm
KA001029	hardness precipitation
KA001030	phosphate col.5-100 ppm

KA001031	chloride colourimetric (0-80 ppm)
KA001032	residual hardness col 0,05-0,3 f degree (0,5 - 3 ppm CaCO ₃)
KA001034	bromine col. 0,2-3 ppm
KA001035	molybdenum tit. 10 ppm
KA001039	manganese col. 0,05-1,5 ppm
KA001041	cyanuric acid turb.
KA001043	copper col.
KA001045	sulfate turb.
KA001047	chlorine dioxide 0,1-1,5 ppm

AN-KIT ECONOMY

Günstige Schnelltest-Kits



Bestellcode:	Bezeichnung:
KA005001HD	hardness 1 bottle indicator-titrant °D
KA005001HF	hardness 2 bottles indicator-titrant °F
KA005006HD	hardness 1 bottle indicator-titrant °D
KA005006HF	hardness 2 bottles indicator-titrant °F
KA005010	swim.pool (total chlorine and pH)
KA005011	residual hardness titration
KA005030	pH 5-9,5 col.

AN-KIT-REAG T

Titrationreagenzien



Bestellcode:	Bezeichnung:
KA003203	calcium A: 6 bottles
KA003207	chloride tit.A 6 bottles
KA003208	chloride tit.B 6 bottles
KA003221	sulfite A 6 bottles

KA003222	sulfite B 6 bottles
KA003247	hardness A 6 bottles (for boiler water)
KA003250	hardness precip.A 6 bottles 25 ml
KA003251	hardness precip.B 6 bottles 25 ml
KA003252	hardness precip. 1x250 A + 1x250 B
KA003253	hardness precip. 2x250 A
KA003254	hardness precip. 2x250 B
KA003260	soap solution 6 bottles 25 ml
KA003261	soap solution 6 bottles 250 ml
KA003263	molybdane tit. A 6 bottles
KA003265	molybdane tit. B 6 bottles

AN-KIT REA CL

Ersatzteile für chlorimetrische Reagenzien - Packung mit 6 Flaschen



Bestellcode:	Bezeichnung:
KA003201	ammonia A
KA003202	ammonia B
KA003204	chlorine total
KA003209	chromate A
KA003210	chromate B
KA003211	iron
KA003212	residual hardness
KA003213	phosphate 1-20 ppm A
KA003214	phosphate 1-20 ppm B
KA003215	hydrazine
KA003216	nitrite
KA003218	silica A
KA003219	silica B
KA003220	silica C
KA003240	chlorine DPD B
KA003241	chlorine DPD C
KA003244	nitrate
KA003255	chloride col.A
KA003256	chloride col.B
KA003257	phosphate 5-100 ppm A
KA003258	phosphate 5-100 ppm B
KA003266	chlorine dioxide A
KA003267	chlorine dioxide B

KA003268	chlorine dioxide C
KA003276	manganese col.A
KA003278	manganese col.B
KA003279	manganese col.C
KA003282	bromine A
KA003283	bromine B
KA003284	bromine C
KA003286	cyanuric acid
KA003288	sulphate A
KA003290	sulphate B
KA003292	copper A
KA003294	copper B
KA3239	chlorine DPD A

AN-KIT RIC T 25

Titrant Ersatzteile 25 ml - Packung mit 6 Flaschen



Bestellcode:	Bezeichnung:
KA003101	alcalinity 1 °f
KA003105	acidity 1°f
KA003107	calcium 1°f
KA003109	chloride 1°f
KA003111	hardness 1°f
KA003113	sulfite 2 ppm
KA003113,1	sulfite 10 ppm
KA003123	molybdane 10 ppm
KA3103	alcalinity 1 epm

AN-KIT RIC T 250

Titrant Ersatzteile 250 ml - Packung mit 6 Flaschen



Bestellcode:	Bezeichnung:
KA003102	alcalinity 1 °f
KA003104	alcalinity 1 epm
KA003106	acidity 1°f
KA003108	calcium 1°f
KA003110	chloride 1°f
KA003112	hardness 1°f
KA003114	sulfite 2 ppm
KA003114,1	sulfite 10 ppm
KA003124	molybdane 10 ppm

AN-KIT MULTI

MULTIKIT in blauer starrer Plastikbox



Bestellcode:	Bezeichnung:
KA002001	water analysis
KA002002	boiler water (basic)
KA002004	boiler water (simplified)
KA002004,1	boiler water (simplified - modif.1)
KA002006	swimming pools

AN-KIT TUBE

REAGENZGLÄSER

Bestellcode:	Bezeichnung:
KA003310	10-tubes pack 20 ml

PULSEMITTIERENDE WASSERZÄHLER

CNT-LFI

Pulemittierende Wasserzähler - threaded



Bestellcode:	Bezeichnung:
DSCNTF013RS025	Impulszähler für Wasserzähler Reed Typ 1/2 "DN15 - K: 0,25
DSCNTF020RS025	Impulszähler für Wasserzähler Reed Typ 3/4 "DN20 - K: 0,25
DSCNTF025RS025	Impulszähler für Wasserzähler Reed Typ 1" DN25 - K: 0,25
DSCNTF025RS100	Impulszähler für Wasserzähler Reed Typ 1" DN25 - K: 1
DSCNTF025RSX10	Impulszähler für Wasserzähler Reed Typ 1" DN25 - K: 10
DSCNTF032RS100	Impulszähler für Wasserzähler Reed Typ 1 1/4" DN32 - K: 1
DSCNTF040RS100	Impulszähler für Wasserzähler Reed Typ 1 1/2" DN40 - K: 1
DSCNTF050RS100	Impulszähler für Wasserzähler Reed Typ 2" DN50 - K: 1
DSCNTL050RSX10	Wasserzähler mit Impulsausgabe Reed-Flanschanschluss, DN50 - K: 10

CNT-LFL

Pulemittierende Wasserzähler - bridado




Preise auf Anfrage

Bestellcode:	Bezeichnung:
DSCNTL050RWXX1	Wollmann Kaltwasserzähler 2" DN50 mit Flansch
DSCNTL065RW	Wollmann Kaltwasserzähler 2 1/2" DN65 mit Flansch
DSCNTL080RW	Wollmann Kaltwasserzähler 3" DN80 mit Flansch
DSCNTL100RW	Wollmann Kaltwasserzähler 4" DN100 mit Flansch

TANKS FÜR DOSIERUNGSSYSTEME

SERB PE M

Polyethylentanks "Baureihe M"

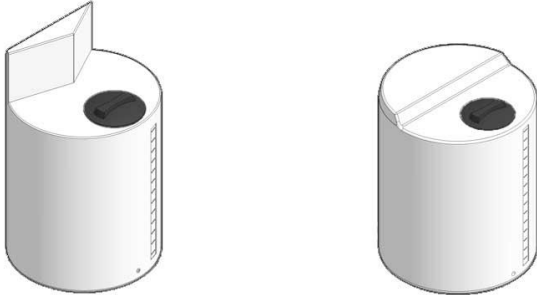
Beschreibung:

Reihe von Behältern für Reagenzienmisch- und Dosierstationen, selbsttragende vertikale zylindrische Form mit flachem Oberteil auf zwei Ebenen, versetzt für die Anwendung von Dosierpumpen und / oder elektrischem Rührwerk mit vertikaler Achse. Sie sind mit einer Ladeklappe mit Gewindeabdeckung, visueller Füllstandsanzeige und am unteren vorderen Teil für die Anwendung des Ablassventils ausgestattet.

Zubehör auf Anfrage:

Lade- / Entladeeinheiten - Zusätzliche Entlüftungsöffnungen - Überlauf - Palettierte oder fahrbare Metallkonstruktionen - Verschiedene Zubehörteile für die Anwendung von Pumpen oder Rührwerken.

Bestellcode:	Bezeichnung:
SRBM0030PE01L	PE-Tank "M" Series Inhalt 30 L
SRBM0060PE01L	PE-Tank "M" Series Inhalt 60 L
SRBM0120PE01L	PE-Tank "M" Series Inhalt 120 L
SRBM0220PE01L	PE-Tank "M" Series Inhalt 220 L
SRBM0325PE01L	PE-Tank "M" Series Inhalt 325 L
SRBM0550PE01L	PE-Tank "M" Series Inhalt 550 L
SRBM1070PE01L	PE-Tank "M" Series Inhalt 1070 L

SUPPORTO-TANK SUPPORT

PP-Tankhalterung für Mischer und / oder Dosierpumpe



PP tank support for mixer and/or dosing pump. Available thickness : 10 mm (for tanks max 500 l) and 20 mm (for tanks up to 1000 l) Preise auf Anfrage

Bestellcode:	Bezeichnung:
AGTSUP100060	Stützfuß 10 mm dick für Rührwerk für 60 l Tank - 334x114x180 mm
AGTSUP100100	Stützfuß 10 mm dick für Rührwerk für 60 l Tank - 415x200x180 mm
AGTSUP100200	Stützfuß 10 mm dick für Rührwerk für 100 l Tank - 415x200x208 mm

AGTSUP100300	Stützfuß 10 mm dick für Rührwerk für 300 l Tank - 535x220x273 mm
AGTSUP100500	Stützfuß 10 mm dick für Rührwerk für 500 l Tank - 760x320x386 mm
AGTSUP200200	Stützfuß 20 mm dick für Rührwerk für 200 l Tank - 415x200x208 mm
AGTSUP200300	Stützfuß 20 mm dick für Rührwerk für 300 l Tank - 535x220x273 mm
AGTSUP200500	Stützfuß 20 mm dick für Rührwerk für 500 l Tank - 760x320x386 mm
AGTSUP201000	Stützfuß 20 mm dick für Rührwerk für 1000 l Tank - 935x415x470 mm

MISCHER
**Agitatori Serie GV - GV
Series Mixers**
Mischer Baureihe GV (schnell)


Schnelle Mischer mit starrer Kupplung durch Motoren 4-6-8 Pole, ausgestattet mit einem Träger, einem Radiallager und einem Dichtungsring. Diese Mischer eignen sich besonders zum Mischen oder Auflösen von Produkten mit niedriger Viskosität in kleinen mittleren Tanks. Maximale Bewertung von Kw 5 weißen Einzel- oder Doppelpersonalboxen. 3-pH-Motoren, auf Anfrage 1-pH-Motoren für eine Stromversorgung unter 0,37 kW (+ 5%). Werkstoffe SS 304 (Standard) - AISI 316 + 8%, Welle und Laufrad in Gummi-Ebanit (auf Anfrage) oder PVC + 25%, Welle und Laufrad in PP Bedeckung eines Stahlkerns (+ 30%).

Bestellcode:	Bezeichnung:
AGT2241000	Mischer-GV-Leistung 0,18 kW-4-polig 3pH 60 cm Laufrad-Strömungskonus Typ AISI 304
AGT2261000	Mischer GV-Leistung 0,18 kW-6 Pole 3pH 60 cm Laufrad-Strömungskonus Typ AISI 304
AGT2341000	Mischer GV Leistung 0,25 kW-4 Pole 3pH 60 cm Laufrad-Strömungskonus Typ AISI 304
AGT2361000	Mischer-GV-Leistung 0,25 kW-6 Pole 3pH 60 cm Laufrad-Strömungskegel Typ AISI 304
AGT2441100	Mischer-GV-Leistung 0,37 kW-4-polig 3pH 80 cm Laufrad-Strömungskonus Typ AISI 304
AGT2461100	Mischer-GV-Leistung 0,37 kW-6 Pole 3pH 80 cm Laufrad-Strömungskonus Typ AISI 304
AGT2541200	Mischer-GV-Leistung 0,55 kW-4-polig 3pH 90 cm Laufrad-Strömungskonus Typ AISI 304
AGT2561200	Mischer-GV-Leistung 0,55 kW-6 Pole 3pH 90 cm Laufrad-Strömungskonus Typ AISI 304
AGT2641400	Mischer-GV-Leistung 0,75 kW-4-polig 3pH 100 cm Laufrad-Strömungskonus Typ AISI 304
AGT2661400	Mischer-GV-Leistung 0,75 kW-6 Pole 3pH 100 cm Laufrad-Strömungskegel Typ AISI 304
AGT2741600	Mischer-GV-Leistung 1,1 kW-4-polig 3pH 125 cm Laufrad-Strömungskonus Typ AISI 304
AGT2761600	Mischer-GV-Leistung 1,1 kW-6-polig 3pH 125 cm Laufrad-Strömungskonus Typ AISI 304
AGT2841700	Mischer-GV-Leistung 1,15 kW-4-polig 3pH 150 cm Laufrad-Strömungskonus Typ AISI 304
AGT2861700	Mischer-GV-Leistung 1,15 kW-6-polig 3pH 150 cm Laufrad-Strömungskonus Typ AISI 304

Agitatori Serie V - V Series Mischer Baureihe V (langsam) Mixers



Bestellcode:	Bezeichnung:
AGT3241322	Mischer V 0,18 kW 4 Pole 3 ph 70 cm- 140 Upm Laufrad 4 Flügel 45 °
AGT3341122	Mischer V 0,25 kW 4 Pole 3 ph 80 cm- 90 Upm Laufrad 4 Flügel 45 °
AGT3441422	Mischer V 0,37 kW 4 Pole 3 ph 100 cm- 90 Upm Laufrad 4 Flügel 45 °
AGT3541422	Mischer V 0,55 kW 4 Pole 3 ph 100 cm- 90 Upm Laufrad 4 Flügel 45 °
AGT3641522	Mischer V 0,75 kW 4 Pole 3 ph 120 cm- 80 Upm Laufrad 4 Flügel 45 °
AGT3741722	Mischer V 1,1 kW 4 Pole 3 ph 150 cm- 90 Upm Laufrad 4 Flügel 45 °
AGT3841722	Mischer V 1,5 kW 4 Pole 3 ph 150 cm - 70 U / min Laufrad 4 Flügel 45 °

Agitatori Serie F - F Series Mischer Baureihe F (max 200 l) Mixers



Bestellcode:	Bezeichnung:
AGT1241001	Mischer F 0,18 kW - SS316 AF 1-6-4 4 4 Pole 3pH 230 V-60 cm - Flügelrad-Strömungskegel
AGT1241003	Mischer F 0,18 kW - PP AF 1-6-4 4 4-polig 3pH 230/400 V-60 cm - Flügelrad-Strömungskonus AISI 304
AGT1241101	Mischer F 0,18 kW - SS316 AF 2-8-4 4 4 Pole 3pH 230 V-80 cm - Flügelrad-Strömungskonus
AGT1241103	Mischer F 0,18 kW - PP AF 2-8-4 4 4-polig 3pH 230/400 V-80 cm - Flügelradkonus
AGT1242001	Mischer F 0,18 kW - SS316 AF 1-6-4 4 4 Pole 1pH 230 V-60 cm - Flügelrad-Strömungskonus
AGT1242003	Mischer F 0,18 kW - PP AF 1-6-4 4 4-polig 1pH 230 V-60 cm - Flügelrad-Strömungskegel
AGT1242101	Mischer F 0,18 kW - SS316 AF 2-8-4 4 4-polig 1pH 230 V-80 cm - Flügelrad-Strömungskonus
AGT1242103	Mischer F 0,18 kW - PP AF 2-8-4 4 4 Pole 1 pH 230/400 V-80 cm - Flügelradkonus
AGTM000002	Handmischer PVC 600 mm
AGTM000102	Handmischer PVC 800 mm